RY-60

Assembly Instructions

PAT PENDING
60kg / 76kg

RocYork
ezconcept.com.au sales@ezconcept.com.au 1300 399 526

Max Panel Width / Height: 920mm / 2100mm

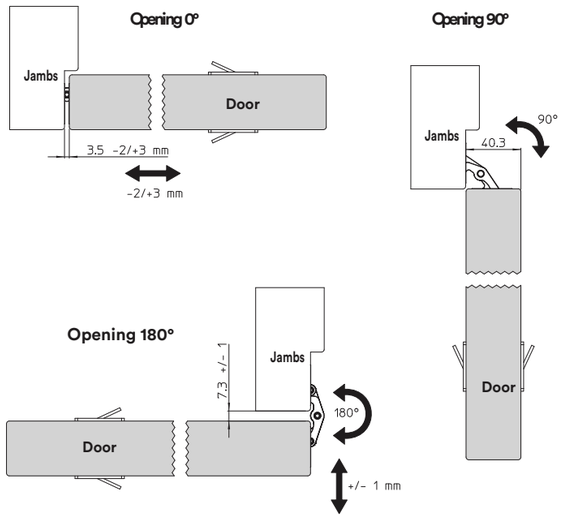

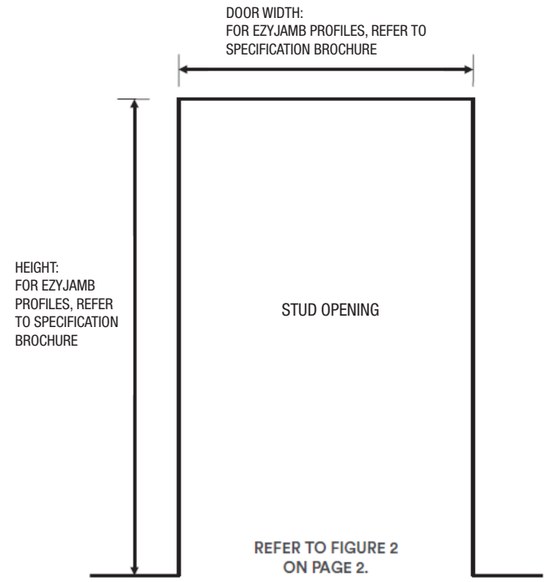

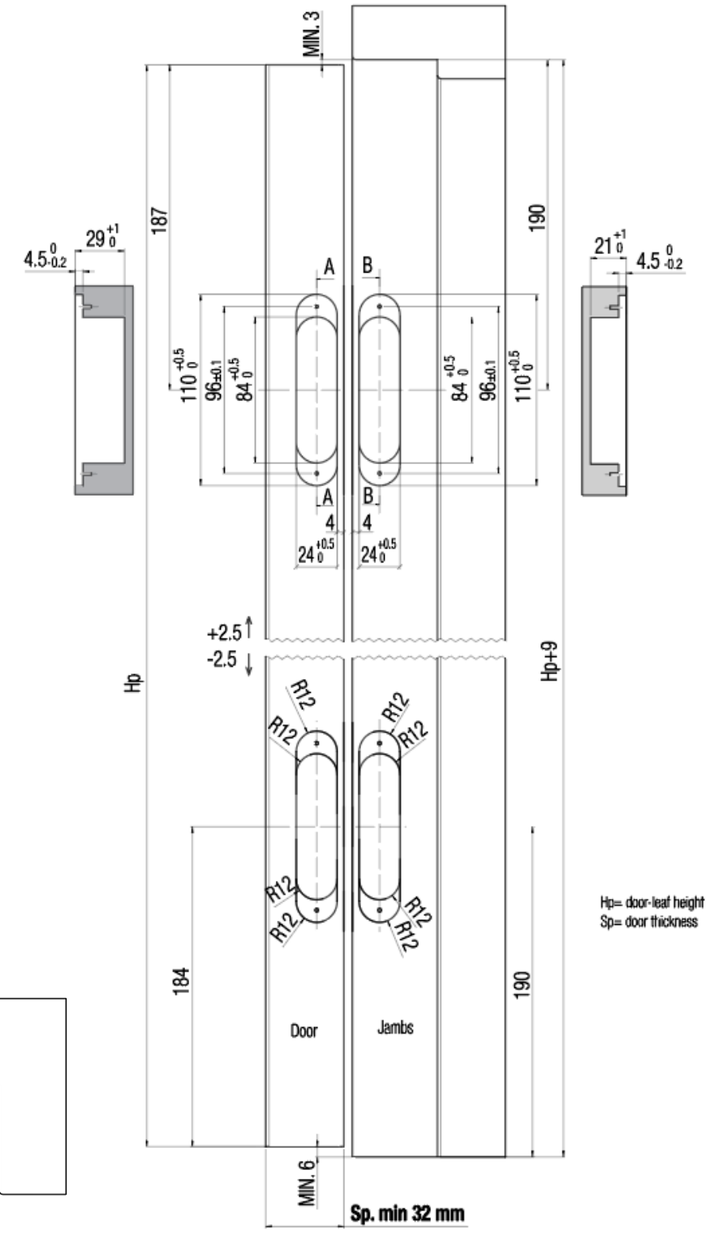

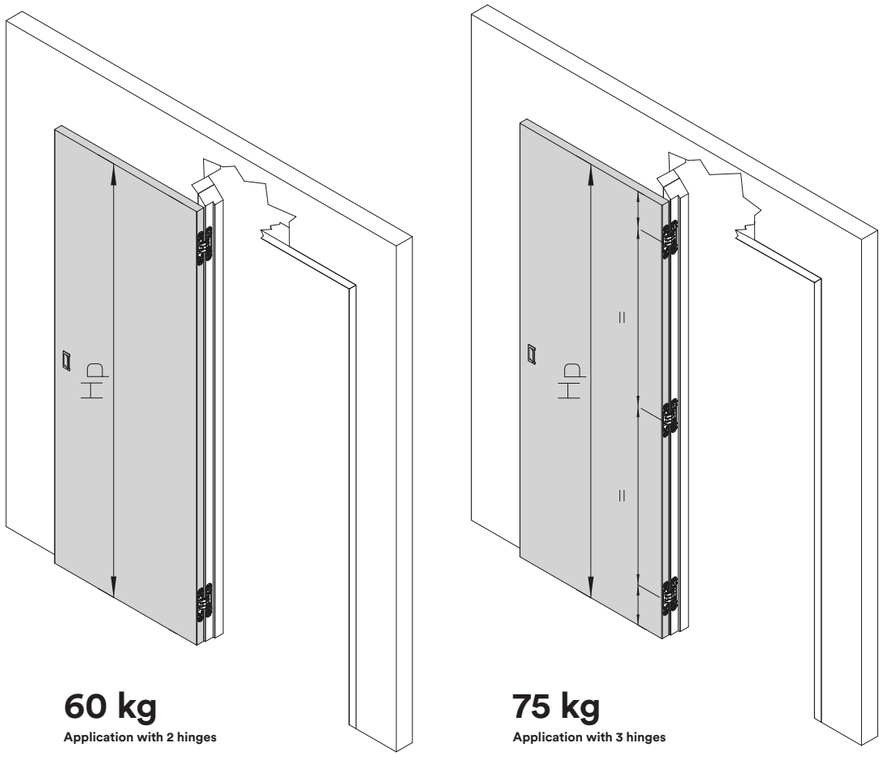

60 kg
Application with 2 hinges

75 kg
Application with 3 hinges

Maximum of 3 hinges can be used with EzyJamb door jambs.

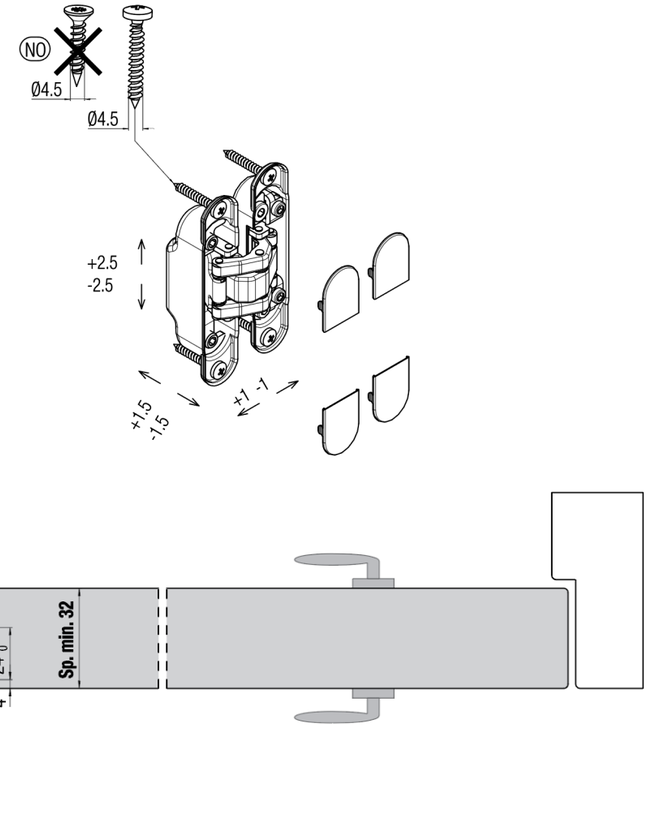

Hp= door-leaf height
Sp= door thickness

RocYork RY60 Installation Instructions_AU_II_0622_DW

RY-60

Assembly Instructions

PAT PENDING
60kg / 76kg

RocYork
ezconcept.com.au sales@ezconcept.com.au 1300 399 526

①

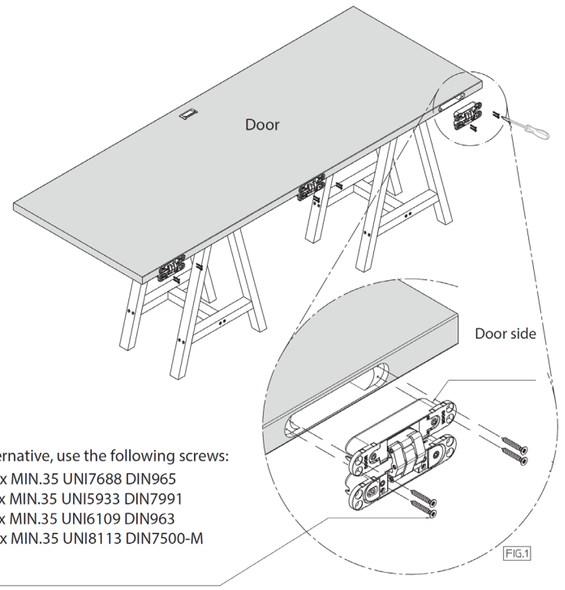

As an alternative, use the following screws:
TSPIC M5x MIN.35 UNI7688 DIN965
TSPEI M5x MIN.35 UNI5933 DIN7991
TSPIT M5x MIN.35 UNI6109 DIN963
TSPIC M5x MIN.35 UNI8113 DIN7500-M

*Set the hinges in the relative door leaf millings (fig.1) and fix them with the relative screws

②

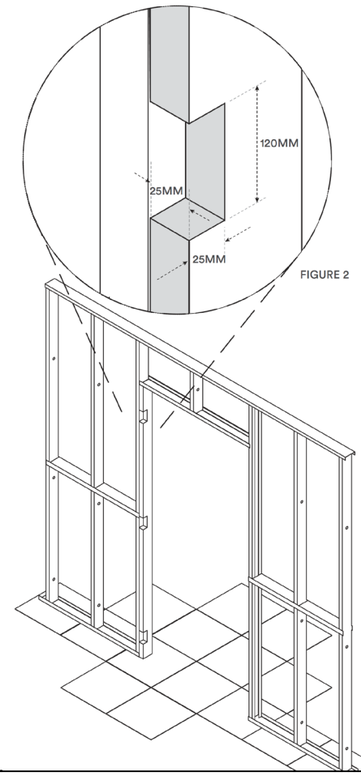

STUD OPENING DETAIL
Prepare a 25mm thick packer fixed to hinge side of jamb stud. Clearance cutouts to be made at hinge locations.

③

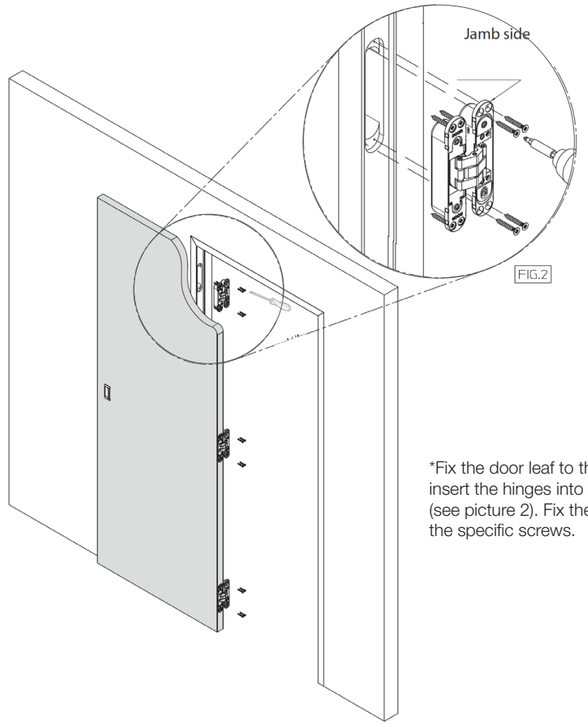

*Fix the door leaf to the jamb and insert the hinges into the millings (see picture 2). Fix the hinges with the specific screws.

④ ADJUSTMENTS

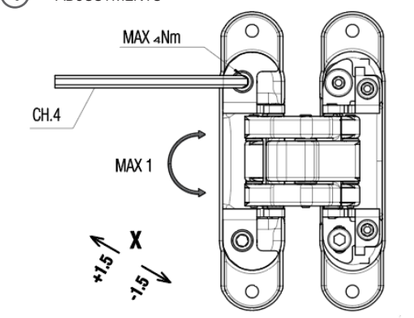

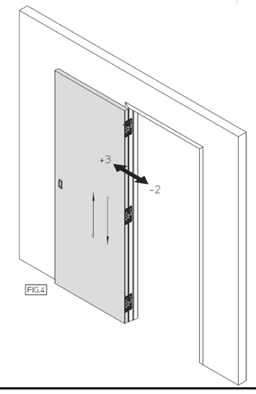

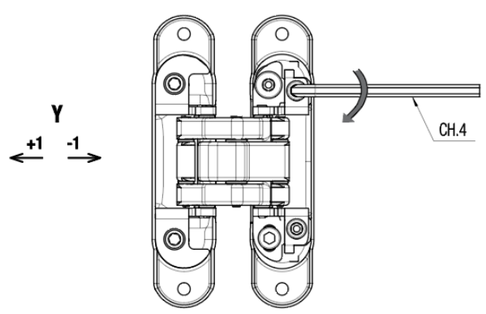

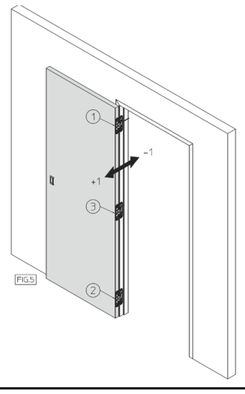

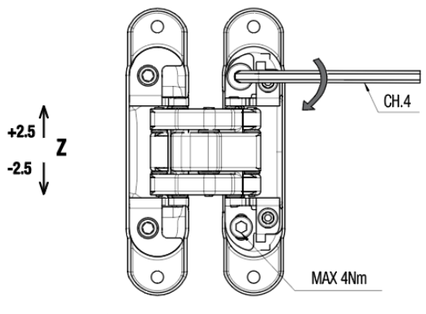

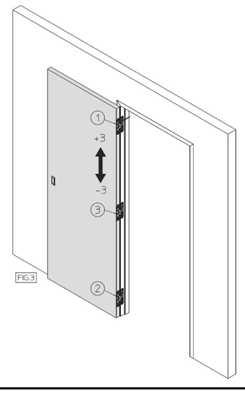

⑤

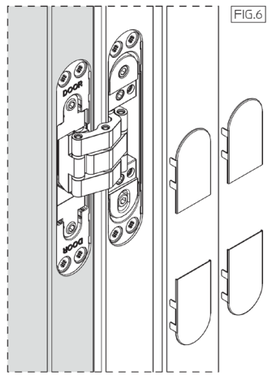

*Application of the frontal coverings (fig.6).



Remove the film