


Product Datasheet


Handing - Liffroff Hinges

Check door width and margin requirements prior to installation. Ensure stud opening is square and level.
The door side of the Liffroff hinge must be rebated.

 10 RocYork screws are supplied with each hinge.




Australian Handling
Left



Australian Handling
Right



 The part with the pin attached to the frame should point up upon installation.


Features and Benefits

- In areas such as toilets and bathrooms where doors must be removable in case of emergencies, RocYork hinges are ideal and code compliant.
- The hinges allow for removal of a hinged door without having to unscrew the hinges.
- Lift off RocYork hinges are available in brushed stainless steel or matte black for a look with class and style.
- Easy to fit and time saving.
- Recommended for internal use.



Product Datasheet

Dimensions

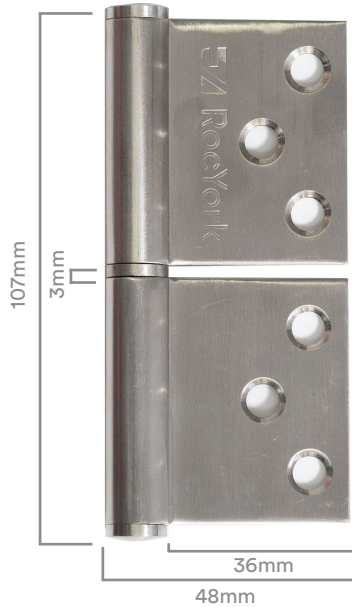

Colouring Options

Stainless Steel



Black



Lift Off Channel

EzyJamb can be easily adapted for use with removable or 'lift off' doors as required for code compliance when installed in bathrooms or toilets.


As stated in NCC (BCA) 2011 F2.5 (b), "The door to a fully enclosed sanitary compartment must be readily removable from the outside"

This criteria can be met by installing an EzyJamb with Lift Off Hinges and the special Lift Off channel for the header which creates a deep rebate that conceals the service gap above the door.



i The Lift Off channel supplied is designed to fit over the header stop and affixed with construction adhesive.

Accreditation/Certification



Further Assistance

Contact the technical engineering team at Studco Technical Services for assistance with specifications, product selection and structural engineering enquiries.

T: 1300 255 255 or email techadvice@studcosystems.com.au