EzyJamb | Electric Strike for EzyJamb Single Rebate (SRC)

Installation Instructions

Electric strike not included with EzyJamb order.

Minimum door thickness for EzyJamb SRC is 38mm.

Non Fire-rated Application.

EzyJamb cut out will suit standard size electric strikes such as the models from Lockwood, FSB, Dormakaba.

Step 1 | Preparation

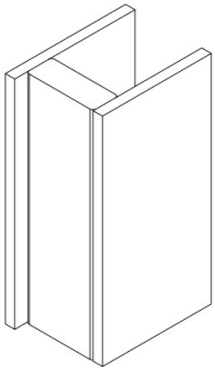

1A Jamb stud with plasterboard installed on wall.

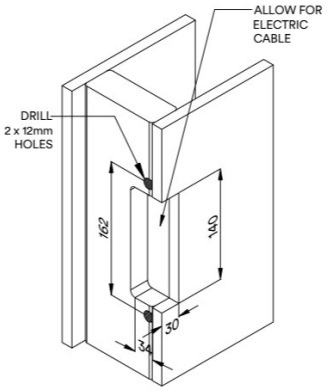

1B Create recess in jamb stud and plasterboard to accommodate electric strike.

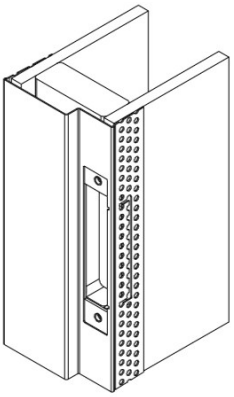

1C Install EzyJamb door frame. Refer to separate instructions

Step 2 | EzyJamb Installation

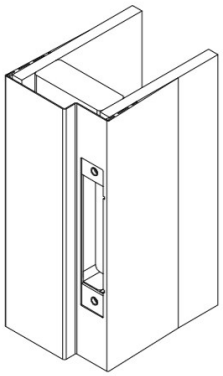

2A Apply plaster stopping compound to flush finish door frame and sand as required

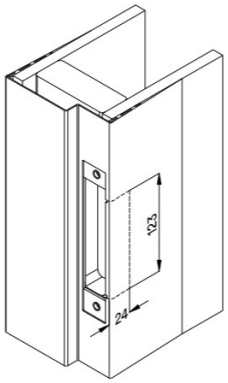

2B Mark cutout on finished plaster.

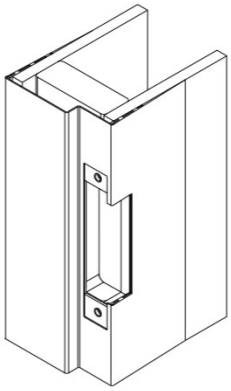

2C Remove plaster compound and stopping bead using multi-tool or similar.

Step 3 | Electric Strike Installation

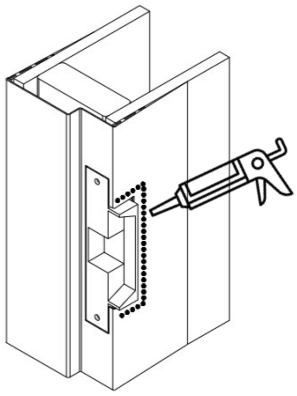

3A Install Electric strike to strike manufacturers specifications. Caulk around strike as required.